

CATALOG#:

PROJECT:

Series OSL

LED Outdoor Sign Lighter

Specification grade fixture, sealed powder coated aluminum extrusion with lens for outdoor applications. The OSL Series is a durable fixture used in both parking and commercial / retail outdoor areas for sign and walkway lighting.

CONSTRUCTION

Powder coated white aluminum extrusion with white interior and cast aluminum end plates. The diffuser / lens is a smooth clear acrylic. Available in 4 and 8 foot nominal lengths.

MOUNTING

Fixtures are typically mounted on conduit.

DIMENSIONS

5.25"W x 3.06"H Available in 4 and 8 ft nominal lengths

FEATURES & BENEFITS

- Fixtures may be coupled for continuous runs without additional accessories.
- Sign lighters rotate up to 360°
- CRI >80
- >50,000 hrs of L70 LED life
- 0-10V Dimming 120-277V
- Power Factor 0.99
- 5 year warranty






CATALOG#:


PROJECT:

TYPE:

Series OSL LED Outdoor Sign Lighter

DRAWINGS & IMAGES

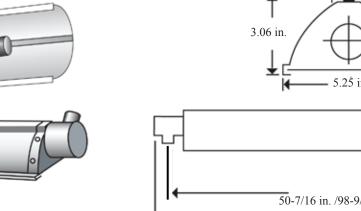

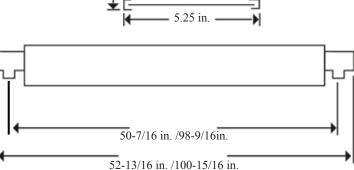

ORDER INFORMATION

4 Ft

SERIES	SIZE	WATTAGE & LUMEN		DRIVER		COLOR	
OSL	48L 48 inch	S32W3200L	32 Watts 3200 Lumens	DMV	0-10V Dimming	30K 35K	3000K 3500K
		S48W4800L	48 Watts 4800 Lumens			40K 50K	4000K 5000K
		S57W5700L	57 Watts 5700 Lumens				
		*	*				

8 Ft

SERIES	SIZE	WATTAGE & LUMENS		DRIVER		COLOR	
OSL	96L 96 inch	S65W6500L	65 Watts 6500 Lumens	DMV	0-10V Dimming	30K 35K	3000K 3500K
		S96W9600L	96 Watts 9600 Lumens			40K 50K	4000K 5000K
		S114W11400L	114 Watts 11400 Lumens				
		*	*				

Note:

*Programmable LED drivers allow custom configured wattages and corresponding lumens.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.